

## 91–117 Remove and install door contact vacuum switch (coupe)

---

### Color coding of the vacuum lines for seat back locking system

---


Control line	light blue
--------------	------------

---

#### Remove

---

- 1 Remove door contact vacuum switch (44) from hinge column.
- 2 Pull off connection piece (17) with control line.
- 3 Pull coupling (45) off door contact vacuum switch (44).

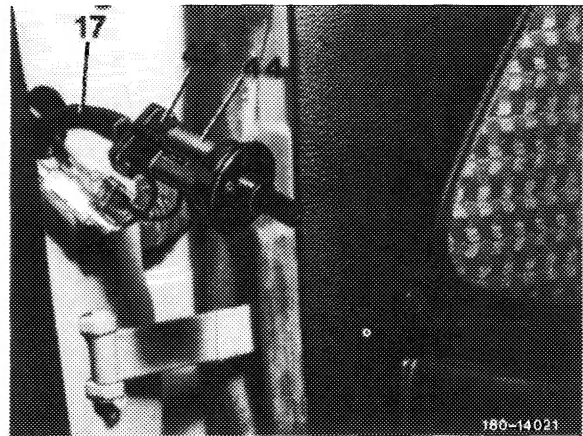

#### Install

---

- 4 Fit coupling (45) to door contact vacuum switch (44).
- 5 Fit connection piece (17) with control line.
- 6 Press door contact vacuum switch (44) in hinge column.

